


## Specifications

Amber	Amber 0.9	Amber 1.2	Amber 1.5	Amber 1.8
Pixel Pitch	0.9375mm	1.25mm	1.5625mm	1.875mm
Max. Brightness Calibrated	700nits	800nits	800nits	800nits
Panel Dimension	600 x 337.5 x 55 mm 23.6" x 13.2" x 2.1"	600 x 337.5 x 55 mm 23.6" x 13.2" x 2.1"	600 x 337.5 x 55 mm 23.6" x 13.2" x 2.1"	600 x 337.5 x 55 mm 23.6" x 13.2" x 2.1"
Panel Resolution (H x V)	640 x 360	480 x 270	384 x 216	320 x 180
Weight Per Panel	8.5kg; 18.7lbs	8.5kg; 18.7lbs	8.5kg; 18.7lbs	8.5kg; 18.7lbs
Power Consumption Max/Average	150W/75W	170W/85W	180W/90W	170W/85W
BTU Max/Average	512 / 235	580 / 267	614 / 282	580 / 267
Transparency	Solid	Solid	Solid	Solid
LED Configuration	4 in 1 LED	4 in 1 LED	4 in 1 LED	SMD1010
Viewing Angle Vertical	140°	140°	140°	140°
Viewing Angle Horizontal	160°	160°	160°	160°
Multiplexing	30	18	18	18
Refresh Rate	1920Hz	3840Hz	3840Hz	3840Hz
Gray Scale	16bit	16bit	16bit	16bit
Frame Material	Diecast Aluminum	Diecast Aluminum	Diecast Aluminum	Diecast Aluminum
Operational Temp / Humidity	-20°~ 45°C, 10-90% RH -4°~113°F, 10-90% RH	-20°~ 45°C, 10-90% RH -4°~113°F, 10-90% RH	-20°~ 45°C, 10-90% RH -4°~113°F, 10-90% RH	-20°~ 45°C, 10-90% RH -4°~113°F, 10-90% RH
Storage Temp / Humidity	-40°~ 60°C, 10-90% RH -40°~140°F, 10-90% RH	-40°~ 60°C, 10-90% RH -40°~140°F, 10-90% RH	-40°~ 60°C, 10-90% RH -40°~140°F, 10-90% RH	-40°~ 60°C, 10-90% RH -40°~140°F, 10-90% RH
IP Rating (Front / Rear)	Indoor	Indoor	Indoor	Indoor
Certifications	CE, ETL, FCC	CE, ETL, FCC	CE, ETL, FCC	CE, ETL, FCC

Notes: The Specifications are for reference, actual values may vary.

## Dimensions

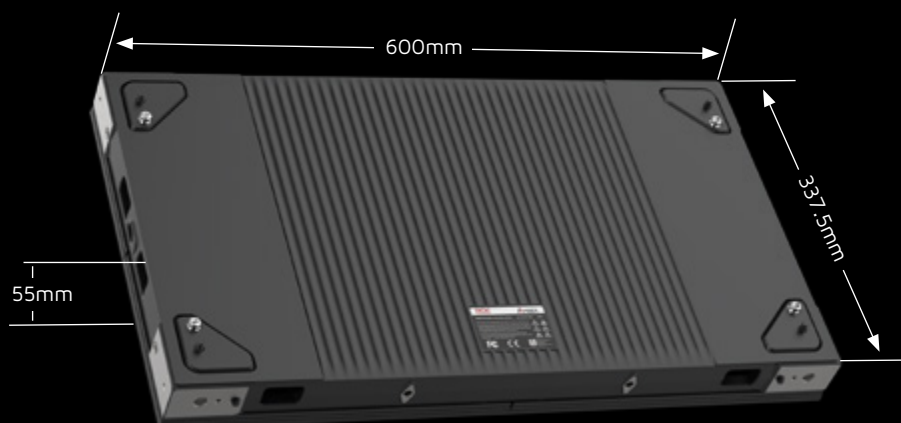

[www.roevisual.com](http://www.roevisual.com)

ROE Visual Co., Ltd. | ROE Visual US, Inc. | ROE Visual Europe BV  
[roe@roevisual.com](mailto:roe@roevisual.com) | [roe@roevisual.com](mailto:roe@roevisual.com) | [roe@roevisual.com](mailto:roe@roevisual.com)