


# Specifications

Jasper	Jasper 2.6	Jasper 3.9
Pixel Pitch	2.60mm	3.91mm
Max. Brightness Calibrated	1,500nits	1,400nits
Panel Dimension	500 x 500 x 60 mm 19.7" x 19.7" x 2.3"	500 x 500 x 60 mm 19.7" x 19.7" x 2.3"
Panel Resolution (H x V)	192 x 192	128 x 128
Weight Per Panel	7.5kg; 16.53lbs	7.5kg; 16.53lbs
Power Consumption Max/Average	190W/95W	160W/80W
BTU Max/Average	648 / 298	546 / 251
Transparency	Solid	Solid
Serviceability	Front / Rear	Front / Rear
Curving (Concave & Convex)	Concave 10°-Convex 10° (customized)	Concave 10°-Convex 10° (customized)
Installation	Hanging/Stacking/Mounting	Hanging/Stacking/Mounting
LED Configuration	SMD 1515 Black	SMD 2020 Black
Viewing Angle Vertical	140°	140°
Viewing Angle Horizontal	160°	160°
Multiplexing	16	16
Refresh Rate	3840Hz	3840Hz
Gray Scale	16bit	16bit
Frame Material	Diecast Aluminum	Diecast Aluminum
Operational Temp / Humidity	-20°~ 45°C, 10-90% RH -4°~113°F, 10-90% RH	-20°~ 45°C, 10-90% RH -4°~113°F, 10-90% RH
Storage Temp / Humidity	-40°~ 60°C, 10-90% RH -40°~140°F, 10-90% RH	-40°~ 60°C, 10-90% RH -40°~140°F, 10-90% RH
IP Rating (Front / Rear)	Indoor	Indoor
Certifications	CE, ETL, FCC	CE, ETL, FCC

Notes: The Specifications are for reference, actual values may vary.

# Dimensions

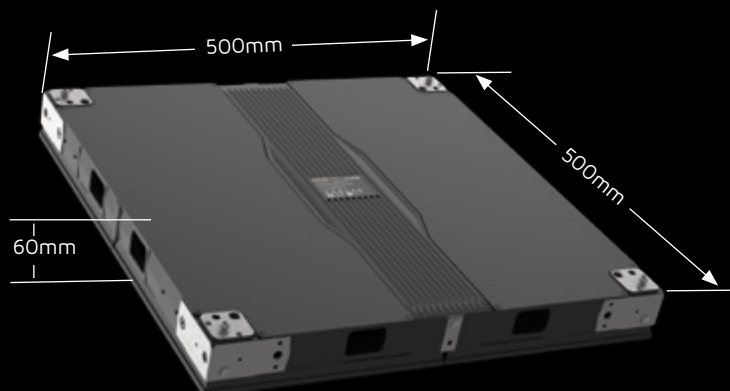

[www.roevisual.com](http://www.roevisual.com)

ROE Visual Co., Ltd. | ROE Visual US, Inc. | ROE Visual Europe BV  
 roe@roevisual.com | roe@roevisual.com | roe@roevisual.com