

Specifications

Vanish	V18	V25
Pixel Pitch	18.75mm	25mm
Max Brightness Calibrated	5000nits	3500nits 4500nits
Panel Dimension	1200mm x 1200mm x 95mm 47.2" x 47.2" x 3.7"	1200mm x 1200mm x 95mm 47.2" x 47.2" x 3.7"
Panel Resolution (H x V)	64 x 64	48 x 48
Panel Weight	17.3kg; 38.1lbs	20.5kg; 45.19lbs
Power Consumption Max / Average	600W / 300W	580W / 290W 640W / 320W
BTU Max / Average	2047 / 942	1979 / 910 2184 / 1004
Transparency	50%	50%
Serviceability	per module	per module
Curving (Concave & Convex)	Concave 10°-Convex 10°	Concave 10°-Convex 10°
Max. Hanging (panels)	12 *1	12 *1
Max. Stacking (panels)	4 *2 (indoor use)	4 *2 (indoor use)
LED Configuration	SMD 2727 White	SMD 3535 White
Viewing Angle Horizontal	140°	140°
Viewing Angle Vertical	120°	120°
Scan Ratio	Static	Static
Refresh Rate	4000Hz	4000Hz
Gray Scale	16bit	16bit
Frame Material	Magnesium Alloy	Magnesium Alloy
Processing Platform	Evision / Brompton	Evision
Operational Temp / Humidity	-20°-45°C, 10-90%RH -4°-113°F, 10-90%RH	-20°-45°C, 10-90%RH -4°-113°F, 10-90%RH
Storage Temp / Humidity	-40°-60°C, 10-90%RH -40°-140°F, 10-90%RH	-40°-60°C, 10-90%RH -40°-140°F, 10-90%RH
IP Rating	Outdoor	Outdoor
Certifications	TUV	CE, ETL, FCC

*Note: The Specifications are for reference, actual values may vary.

1. The max. hanging amount is only valid when the ROE Visual hanging bar and complementary accessories are used and in an indoor situation, safety factor is 8. No climbing is allowed.
2. The max. stacking amount is only valid when the ROE Visual stacking system and complementary accessories are used, sufficient ballast is applied and in an indoor situation. No climbing is allowed.




www.roevisual.com

ROE Visual Co., Ltd. | ROE Visual US, Inc. | ROE Visual Europe BV
 roe@roevisual.com | roe@roevisual.com | roe@roevisual.com

Vanish 18&25


Transparent LED Panels

IN- & OUTDOOR LED PANELS

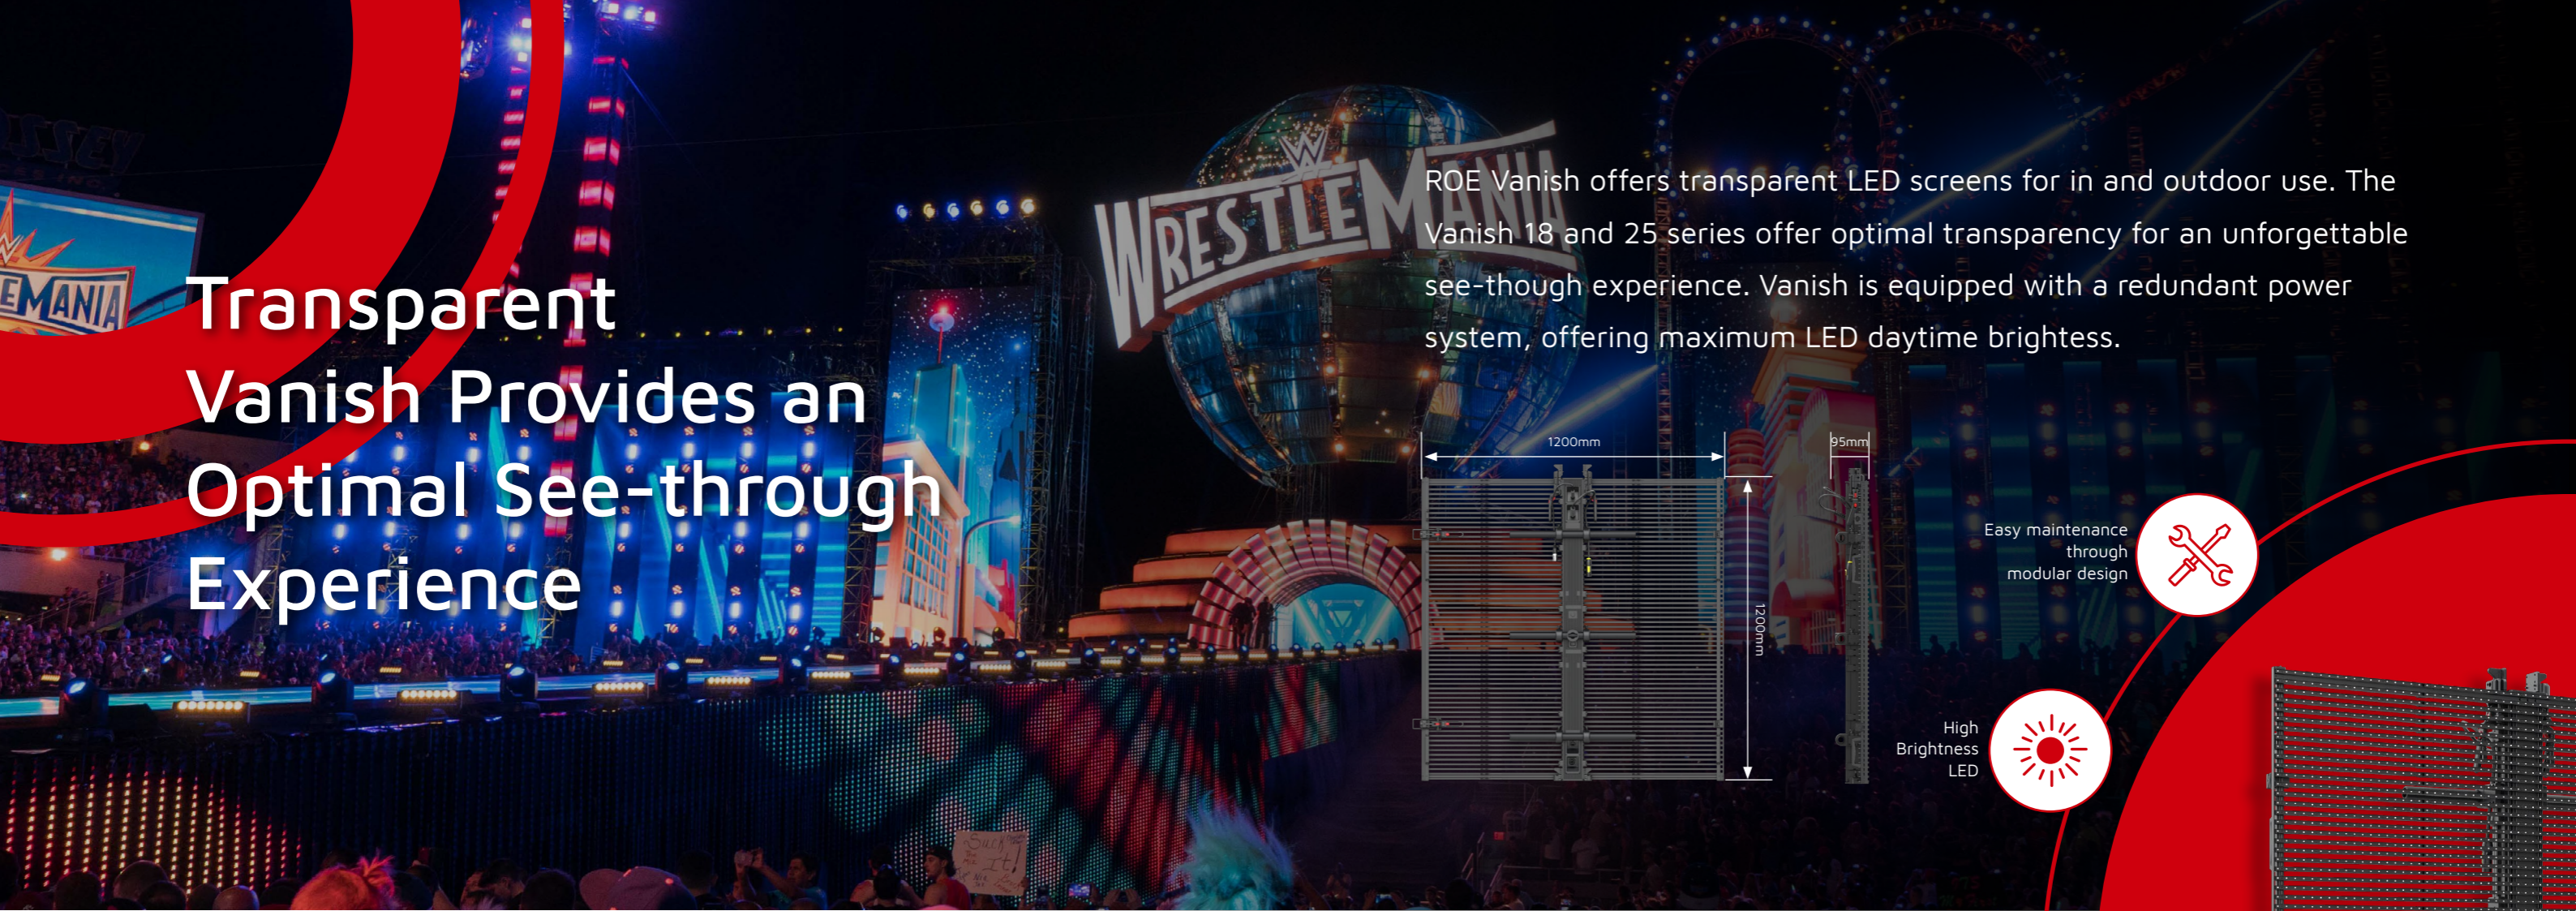

Transparent Vanish Provides an Optimal See-through Experience

ROE Vanish offers transparent LED screens for in and outdoor use. The Vanish 18 and 25 series offer optimal transparency for an unforgettable see-through experience. Vanish is equipped with a redundant power system, offering maximum LED daytime brightness.

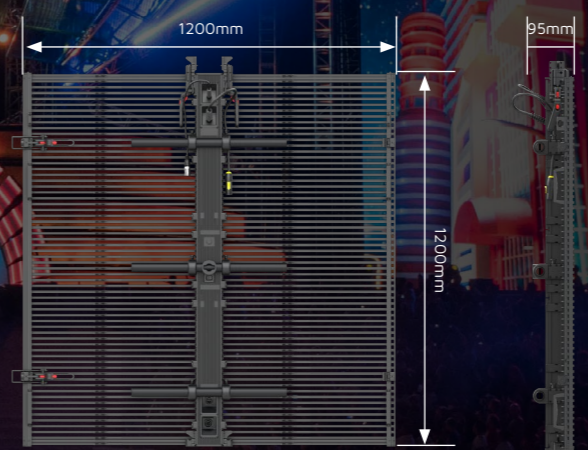

Easy maintenance through modular design




High Brightness LED



Top Choice for Large-scale Installations

Vanish V18 and V25 offer an ideal large pixel pitch transparent LED panel for touring solutions. With a robust dolly and fast-lock system assembly is fast and easy.

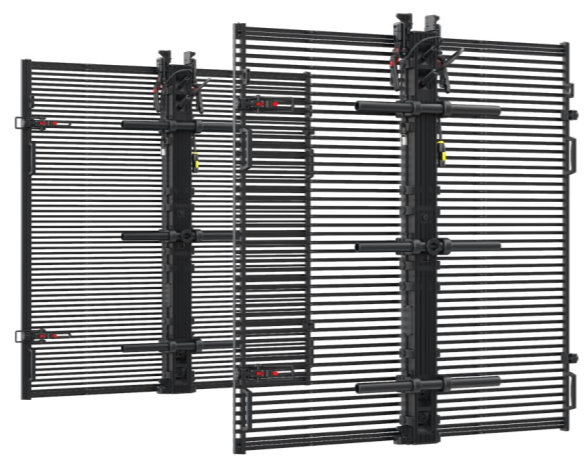


Lightweight


The ROE Visual Vanish only weights 17.3kg per panel.



Curving options



High transparency 50%



Fit for outdoor use-IP65



Highly Transparent

The V18 and V25 LED panels offer 50% transparency. Create a dramatic see-through effect with stunning visuals.

Easy Maintenance

The Vanish V18 and V25 LED panel offer a convenient access system through integrated climbing steps on the panels' backside.

