


Powerful Interactivity

The BM5i panels have embedded optical sensors that detect when they have been activated by a foot, hand or really anything that you'd like to place on the interactive panels. High-resolution tracking on the BM5i floor, with 100 sensors per panel and multi-tracking on small surfaces make the interactivity a powerful tool.


The fast response time of 33 milliseconds and real-time data traffic to the content server make the experience unforgettable.

The BM5i panels use a Brightlogic processor, 2 receiver cards per panel control the interactivity and the display. Mix-and-match with standard BM5 panels is possible, using the same receiver cards. Data access is easy, making linking to Notch or your lighting controls a breeze.





| Module | BM5-PC Matte | BM5-Glass |
|-------------------------------|--|--|
| Pixel Pitch | 5.7692mm | 5.7692mm |
| Max. Brightness Calibrated | 2,000nits | 800nits |
| Panel Dimension | 600 x 600 x 103mm 23.6" x 23.6" x 4.1" | 600 x 600 x 103mm 23.6" x 23.6" x 4.1" |
| Panel Resolution (H x V) | 104 x 104 | 104 x 104 |
| Weight Per Panel | 13.5kg; 29.76lbs | 18.3kg; 40.35lbs |
| Power Consumption Max/Average | 270W / 135W | 270W / 135W |
| BTU Max/Average | 921 / 424 | 921 / 424 |
| Transparency | Solid | Solid |
| Serviceability | Front | Front |
| LED Configuration | SMD 1921 White | SMD 1921 White |
| Viewing Angle Horizontal | 140° | 140° |
| Multiplexing | 4 | 4 |
| Refresh Rate | 1920Hz | 1920Hz |
| Gray Scale | 16bit | 16bit |
| Frame Material | Magnesium Alloy | Magnesium Alloy |
| Operational Temp / Humidity | -20° - 45°C, 10-90%RH -4° -113°F, 10-90%RH | -20°- 45°C, 10-90%RH -4°-113°F, 10-90%RH |
| Storage Temp / Humidity | -40° - 60°C, 10~90% RH -40° -140°F, 10~90% RH | -40° - 60°C, 10-90% RH -40° -140°F, 10-90% RH |
| IP Rating | IP65 | IP65 |
| Certifications | CE, ETL, FCC | CE, ETL |

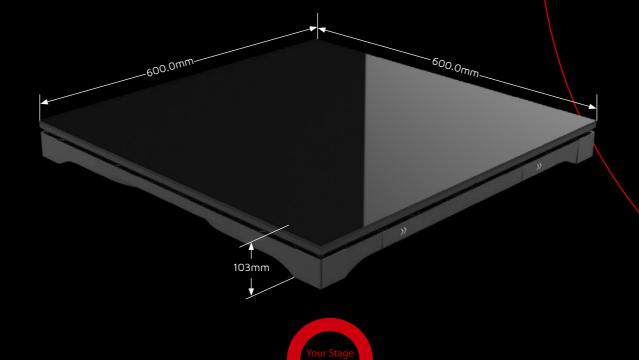



ROE Visual Co., Ltd. \mid ROE Visual US, Inc. \mid ROE Visual Europe BV

roe@roevisual.com usa@roevisual.com europe@roevisual.com



Brilliant LED At Your Feet

Even greater visuals with the perfect finish

With a 5.7mm pixel pitch the LED panels offer excellent visual qualities

Black Marble BM5 & BM5i LED

panels are designed to

offer creative solutions for

any floor or stage

With its enhanced options,

like the anti-moiré finish on the

BM5 and added interactivity on

solution for broadcast, live music,

the BM5i, these panels are an ideal

corporate events and a variety

of other applications.

The Black Marble LED panels

are well-suited to create an

immersive experience


on floors, walls,

multi-level stages

or stairs.

Matte Finish

A non-reflective led panel, ideal for broadcast and live events

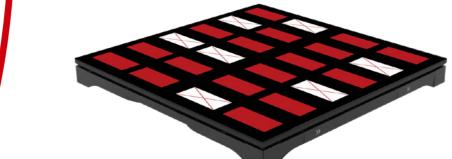

Like the Black Mable BM4, the BM5 & BM5i LED panels can be built as led floor, led wall, stairs and multi-level stages. This thought-trough integrated system is very easy to install and enables users to use their creative

Versatile System

applications freely.

Deep Black Finish

A stylish glossy panel offering a true, deep black color, for a high-tech design look and feel, ideal for retail, architectural and exhibition applications



Create Visual Illusions Beyond Your Imagination

Automatic Calibration

dust, chairs or other foreign objects.

The control system for the BM5i, constantly calibrates

the floor surface to make sure it only reports back

actual touches and neglects transients, such as dirt,

Black Marble BM5 & BM5i Brilliant LED at your feet

All support options are easy and fast to install. Using a minimum number of tools, you can reduce assembly time and safe on labor costs.





Guaranteeing a safe and sturdy floor support. The floor is designed to take a load of 1000 kg/m².



Safe Access antislip surface on all LED panels.



Magnetic Modules, easy module swapping



