

Specifications

Version: R251119

Omni Tube	1200mm Omni Tube
Luminous flux (lv)	800 LM
Tubel Dimension	1200 mm (L) × 50 mm (D)
Pixel Pitch	11.95 mm
Tube Resolution (H x V)	1 x 32
Weight Per Tube	1.2kg; 2.2lbs
Tube Power Consumption Max / Avera ge	40W / 20W
Power Box Consumption	2500W
Processing Platform	Novastar
Processing	MX40-ROE
LED Configuration	SMD 2835 White
Viewing Angle	360°
Scan Ratio	Static
Gray Scale	16bit
Shell Material	Aluminum, PC
Operational Temp / Humidity	-20°- 45°C, 10-90% RH -4°-113°F, 10-90% RH
Storage Temp / Humidity	-40°- 60°C, 10-90% RH -40°-140°F, 10-90% RH
IP Rating	IP65
Certifications	CE, CB, ETL, FCC, UKCA, WEEE

*Note: The Specifications are for reference, actual values may vary.

Dimensions



www.roevisual.com

ROE China | ROE US | ROE EU | ROE UK | ROE JP | ROE ME | ROE AUS
roe@roevisual.com


ROE
CREATIVE DISPLAY



Omni Tube


Illuminate the Stage in 360°

IN-AND OUTDOOR LED PANELS







With a high brightness of 800 lumens, it's ready to impress audiences with your creative ideas. The Omni Tube has a standard length of 120 cm and can be easily connected into various shapes such as strips, triangles, cubes, and more.

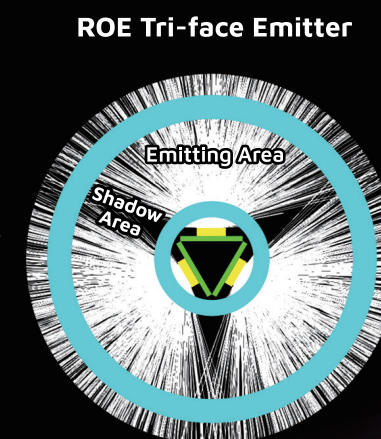

**IN-AND
OUTDOOR**



Unleash your creativity with Omni Tube. Omni Tube allows for versatile combinations, thanks to its specially designed connectors, cables, and locking pins, enabling you to transform any stage with a touch of innovation. Its vibrant illumination enhances any stage, allowing for versatile configurations and flexible assembly options.

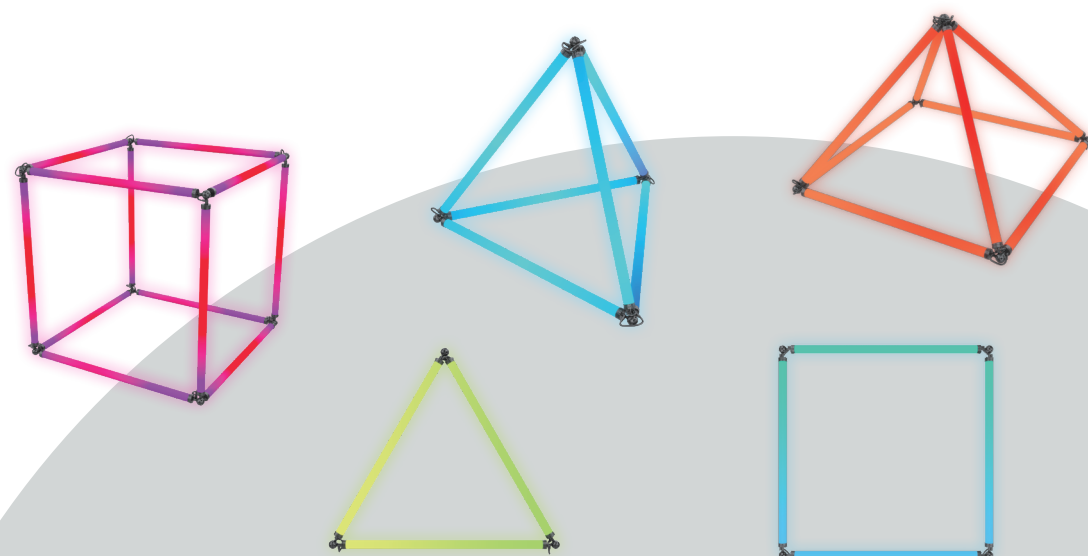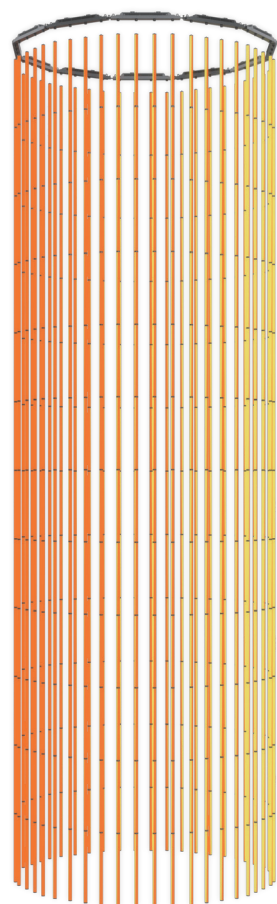

The Omni Tube is designed with a specially engineered structure and advanced LED technology, providing an impressive brightness of 800 lumens that stands out both day and night. With an IP65 rating, the Omni Tube is perfect for both indoor and outdoor use.



Omni Tube is easy to control using the ROE Visual customized processor. Transform your ideas into reality by mapping the tubes to align with your vision.