

ROE Display
Solutions



Opal Outdoor

Versatile LED Platform

OUTDOOR FIXED INSTALL

Opal LED Platform


What inspires you?

LED panels that feed the desire to create,
facilitating imaginative and extraordinary designs.



Create Without Restrictions

Enabling out of the ordinary designs without customizing
your LED panel time and again; that's what inspired ROE
Visual to create Opal.


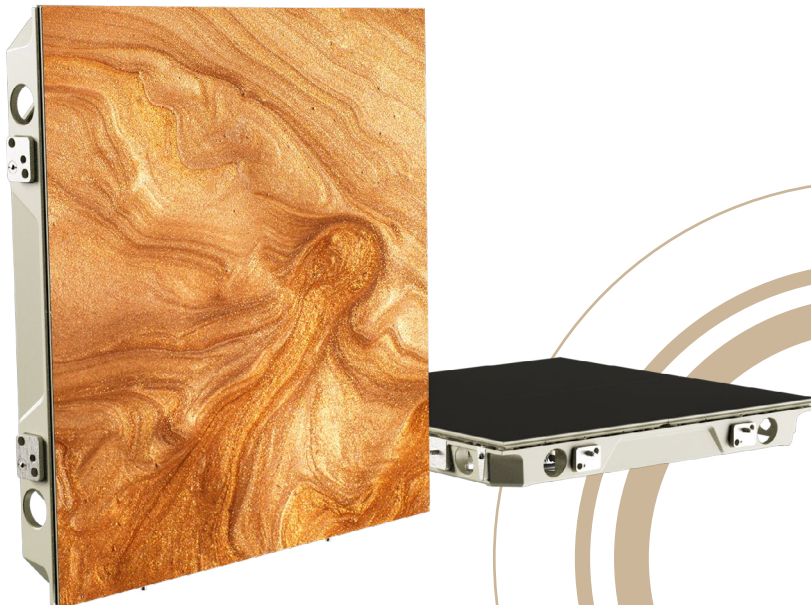


Don't Compromise On Your Visuals

The Opal LED panel platform stands out with a staggering visual performance. Using black LEDs, the Opal LED canvas offers a high contrast ratio and a wide color gamut, delivering a high-definition viewing experience with unmatched color accuracy.

Opal: The Versatile LED Platform

Opal is a versatile LED platform conceptualized to aid designers in creating out-of-the-box designs. Its adaptable design, based on 300x300mm square LED modules, translates into various frame dimensions which can be combined like Lego blocks, creating room for artistic, immersive displays that are out of the ordinary. Opal uses just one platform that accommodates both in- and outdoor applications.

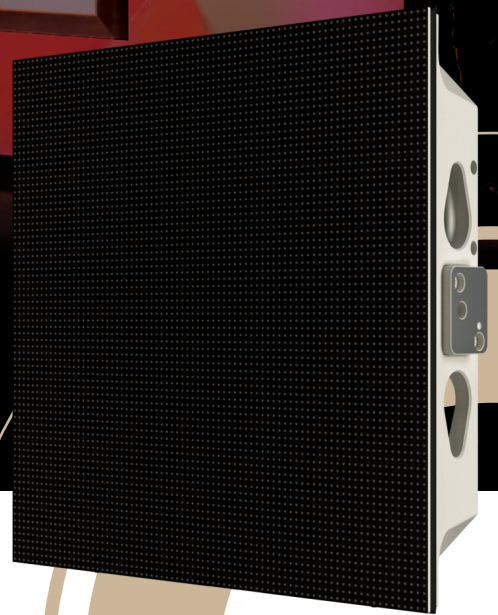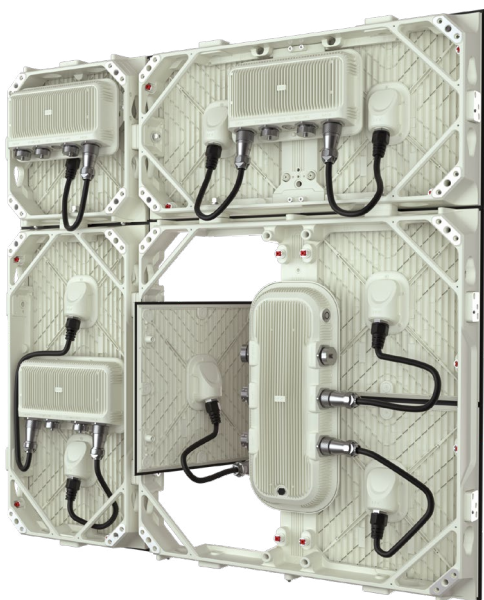

Energy saving
common cathode technology



Universal module



IP65 waterproof



Easy maintenance



Universal design
frames in
horizontal and
vertical orientations




Hanging, stacking
and mounting



Curved configuration possible



“ Flexible Solution with Fine Pixel Pitch,
Premier Choice for the Outdoor Installations ”

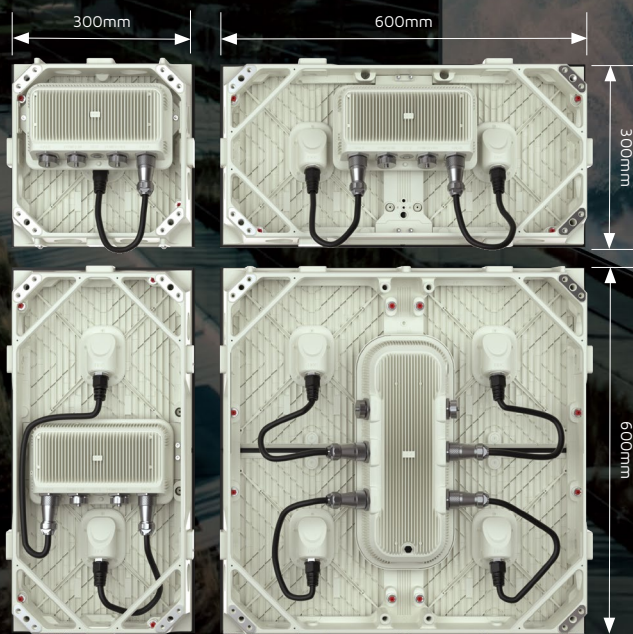


Universal Frames Enable Creative Design


Take your creativity where it leads you. The Opal LED modules and panel frames are developed to offer easy installation. The universal Opal modules and panel frames are designed to accommodate either a flat or curved, zero-bezel LED canvas. With solutions for wall-mounting, stacking, or even hanging, the Opal LED modules can be placed in any environment to create eye-catching and immersive effects.

Flawless Display


Due to high-precision engineering and manufacturing, the mounting frame has high tolerance. XYZ axes alignment is easy and can be done without removing the LED module. This will result in perfectly aligned, seamless, and flat LED walls.

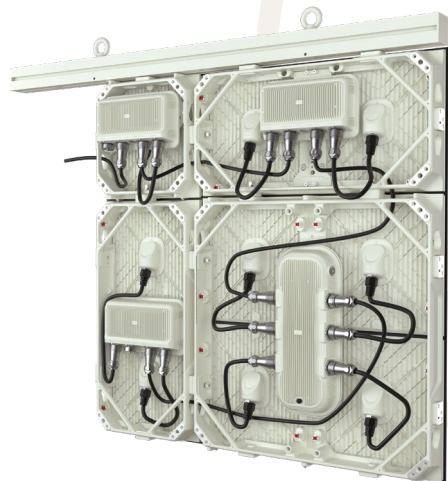

Hanging

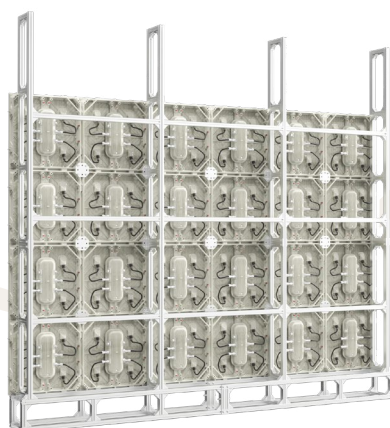

Stacking

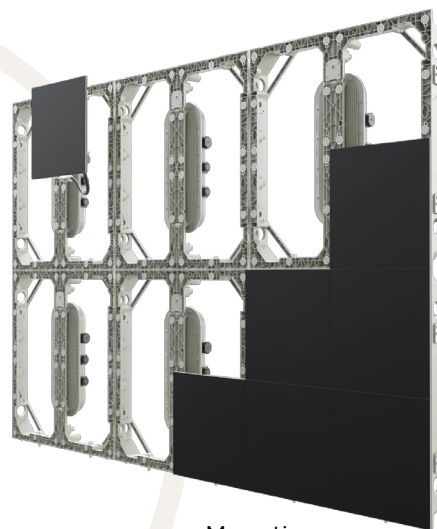


Mounting

Specifications

Opal	Opal 3.75			
Pixel Pitch	3.75mm			
Max Brightness Calibrated	5000nits			
Panel Dimentions	600mm x 600mm x 90mm 23.6" x 23.6" x 3.5"	600mm x 300mm x 90mm 23.6" x 11.8" x 3.5"	300mm x 600mm x 90mm 11.8" x 23.6" x 3.5"	300mm x 300mm x 118mm 11.8" x 11.8" x 4.6"
Panel Resolution (H x V)	160 x 160	160 x 80	80 x 160	80 x 80
Panel Weight	9.28kg / 20.5lbs	4.91kg / 10.8lbs		3.29kg / 7.25lbs
Frame Dimentions	600mm x 600mm x 56mm 23.6" x 23.6" x 2.2"	600mm x 300mm x 56mm 23.6" x 11.8" x 2.2"	300mm x 600mm x 56mm 11.8" x 23.6" x 2.2"	300mm x 300mm x 56mm 11.8" x 11.8" x 2.2"
Frame Weight	3.72kg / 8.2lbs	2.54kg / 5.6lbs		1.46kg / 3.2lbs
Module Size	300mm x 300mm; 11.8" x 11.8"			
Power Consumption Max / Average	300W / 150W	160W / 80W		85W / 45W
BTU Max / Average	1025 / 470	545 / 250		290 / 135
Transparency	Solid			
Serviceability	Front / Rear			
Curving (Concave & Convex)	Concave 15°~Convex 15°			
LED Configuration	Black SMD 1415 common cathode			
Viewing Angle Horizontal	160°			
Viewing Angle Vertical	140°			
Refresh Rate	3840Hz			
Gray Scale	15bit			
Frame Material	Die-casting Aluminum			
Installation	Hanging / Stacking / Mounting			
Processing Platform	MVR / Brompton			
Operational Temp / Humidity	-20°~45°C, 10~90%RH -4°~113°F, 10~90%RH			
Storage Temp / Humidity	-40°~60°C, 10~90% RH -40°~140°F, 10~90% RH			
IP Rating (Front / Rear)	IP67			
Certifications	CE, FCC, ETL, PSE, RoHS, UL			

Notes: The specifications are for reference, actual values may vary.

Dimensions

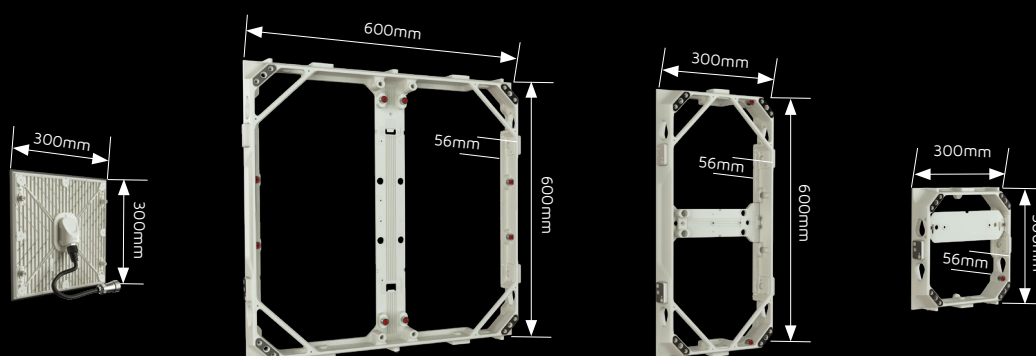

www.roevisual.com

ROE China | ROE US | ROE EU | ROE UK | ROE JP | ROE ME
roe@roevisual.com