

ROE

CREATIVE DISPLAY



Topaz 2.6 Customized

High-Performing Efficiency

INDOOR LED PANELS

Topaz: The All-purpose Live Events LED Panel

Are you looking for a high-efficient LED panel with trusted ROE Visual quality? Topaz fits that bill seamlessly. With its high-precision mechanics and excellent visual quality, it offers everything you love about ROE Visual. Topaz is a LED panel that combines stable and reliable performance with affordable cost-of-ownership, playing into the market challenges of AV-rental companies.



The Road-ready Rental Panel

Topaz offers excellent visual quality in a sturdy frame that assembles with the precision and ease you're accustomed to – just like all ROE Visual LED panels. Topaz is easy to hang or stack, allowing for seamless installations that foster creativity in stage design.



Stacking

Don't Sacrifice Quality

There's no need to balance quality or specs against your return on investment. Topaz offers the best of both worlds, a high-efficient LED panel with a high utilization potential. Topaz allows you to lower your initial investment without sacrificing quality.



Hanging



Unleash Creativity with Exceptional Visuals

Experience the brilliance of the Topaz LED panel, designed to captivate with its 2.6 pixel pitch and vibrant colors. This indoor LED solution is a high-effective marvel, ideal for various applications including.

Pixel pitch 2.6


High-Efficient

Lightweight panel design

Modular design
PSU and HUB
combined in one unit


High-brightness,
1500 nits

Front and rear
module service

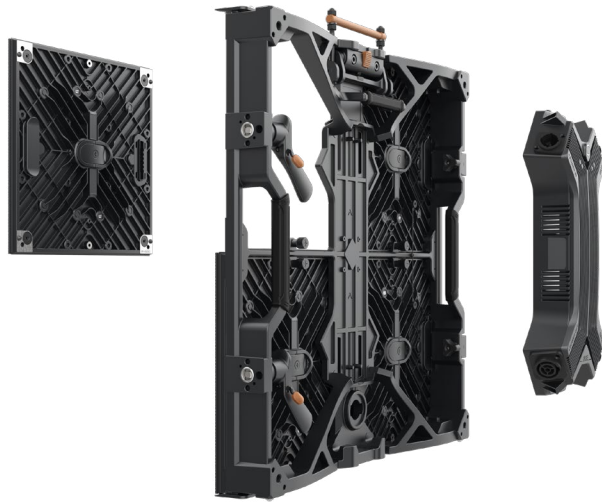

Your Daily Workhorse

Maintenance is a breeze with the Topaz panels, featuring both front and rear module service. The integrated PSU and Hub unit streamline repair and spare part replacement, making maintenance easy and cost-effective.



Specifications

Topaz	Topaz 2.6 customized version
Pixel Pitch	2.604mm
Max Brightness Calibrated	1500nits
Panel Dimension	500mm x 500mm x 73mm 19.7" x 19.7" x 2.87"
Panel Resolution (H x V)	192 x 192
Weight Per Panel	8.0kg; 17.64lbs
Power Consumption Max / Average	140W(common anode) / 70W
BTU Max / Average	480 / 220
Transparency	Solid
Serviceability	Front / Rear
LED Configuration	SMD 1515 Black
Curving (Concave & Convex) *1	Concave 5°-Convex 5°
Max. Hanging panels *2	20
Max. Stacking panels *3	12
Viewing Angle Horizontal	160°
Viewing Angle Vertical	160°
Scan Ratio	1/16
Refresh Rate	7680Hz
Gray Scale	16bit
Processing Platform	Megapixel / Brompton / Evision
Frame Material	Magnesium Alloy
Operational Temp / Humidity	-20°~45°C, 10~90% RH -4°~113°F, 10~90% RH
Storage Temp / Humidity	-40°~60°C, 10~90% RH -40°~140°F, 10~90% RH
IP Rating	IP40
Certifications	CE, CB, ETL, FCC, UKCA, WEEE, KC


*Note: The specifications are for reference, actual values may vary.

*1 Convex curving ability only applies to custom tiles.

*2 The max. hanging amount is only valid when the ROE Visual hanging bar and complementary accessories are used and in an indoor situation. The safety factor is 8. No climbing is allowed.

*3 The max. stacking amount is only valid when the ROE Visual stacking system and complementary accessories are used, sufficient ballast is applied and in an indoor situation. No climbing is allowed.

Dimensions

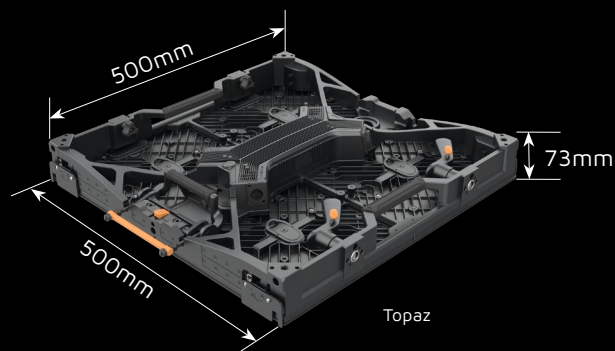

www.roevisual.com

ROE China | ROE US | ROE EU | ROE UK | ROE JP | ROE ME | ROE AUS
roe@roevisual.com