


Specifications

Module	Vanish 8
Pixel Pitch	8.9mm
Max. Brightness Calibrated	2,500nits
Panel Dimension	1000 x 500 x 35mm (Power Box 100.7mm) 39.4" x 19.7" x 1.4" (Power Box 3.9")
Panel Resolution (H x V)	112 x 56
Weight Per Panel	6.5kg; 14.33lbs
Power Consumption (Max/Average)	320W / 160W
BTU Max/Average	1092 / 502
Transparency	60%
Serviceability	Front
Curving (Concave & Convex)	Concave 15°-Convex 5°
Max. Hanging (panels)	24*1
Max. Stacking (panels)	12*2
LED Configuration	SMD 1515 Black
Viewing Angle Vertical	140°
Viewing Angle Horizontal	160°
Scan Ratio	1/4
Refresh Rate	6576Hz
Gray Scale	16bit
Frame Material	Aluminium Alloy
Operational Temp / Humidity	-20°- 45°C, 10-90%RH / -4°-113°F, 10-90%RH
IP Rating	Indoor
Certifications	CE, ETL, FCC

*Note: The Specifications are for reference, actual values may vary.

1. The max. hanging amount is only valid when the ROE Visual hanging bar and complementary accessories are used and in an indoor situation, safety factor is 8. No climbing is allowed.
2. The max. stacking amount is only valid when the ROE Visual stacking system and complementary accessories are used, sufficient ballast is applied and in an indoor situation. No climbing is allowed.

Dimensions

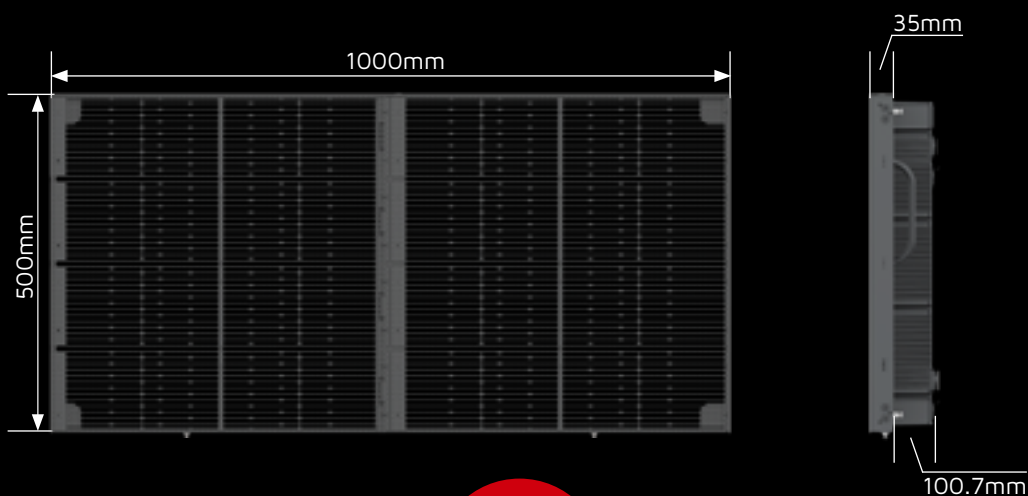

www.roevisual.com

ROE Visual Co., Ltd. | ROE Visual US, Inc. | ROE Visual Europe BV
 roe@roevisual.com | usa@roevisual.com | europe@roevisual.com