


# Specifications

| Black Marble                  | BM4 Glass                                      | BM4 Matte                                      | BM4-Mirror                                     |
|-------------------------------|--|--|--|
| Pixel Pitch                   | 4.76mm   | 4.76mm   | 4.76mm   |
| Max. Brightness Calibrated    | 800nits  | 2,000nits (Deep Black Matte)                   | 1,300nits                                      |
| Panel Dimension               | 609.6 x 609.6 x 130mm<br>24" x 24" x 5.1"      | 609.6 x 609.6 x 130mm<br>24" x 24" x 5.1"      | 609.6 x 609.6 x 130mm<br>24" x 24" x 5.1"      |
| Panel Resolution (H x V)      | 128 x 128                                      | 128 x 128                                      | 128 x 128                                      |
| Panel height incl.frame/feet  | 159-199mm                                      | 153-193mm                                      | /  |
| Weight Per Panel              | 21.65kg; 47.73lbs                              | 16kg; 35.27lbs                                 | 21.65kg; 47.73lbs                              |
| Power Consumption Max/Average | 290W / 145W                                    | 290W / 145W                                    | 290W / 145W                                    |
| BTU Max/Average               | 989/ 455                                       | 989/ 455                                       | 989/ 455                                       |
| Transparency                  | Solid  | Solid  | Solid  |
| Serviceability                | Front  | Front  | Front  |
| LED Configuration             | SMD 1921 White                                 | SMD 1921 White                                 | SMD 1921 White                                 |
| Viewing Angle Horizontal      | 140°   | 140°   | 140°   |
| Scan Ratio                    | 1/8  | 1/8  | 1/8  |
| Refresh Rate                  | 1920Hz   | 1920Hz   | 1920Hz   |
| Gray Scale                    | 16bit  | 16bit  | 16bit  |
| Frame Material                | Magnesium Alloy                                | Magnesium Alloy                                | Magnesium Alloy                                |
| Operational Temp / Humidity   | 0°~ 45°C, 10-90% RH<br>32°~113°F, 10-90% RH    | 0°~ 45°C, 10-90% RH<br>32°~113°F, 10-90% RH    | 0°~ 45°C, 10-90% RH<br>32°~113°F, 10-90% RH    |
| Storage Temp / Humidity       | -40°~ 60°C, 10-90% RH<br>-40°~140°F, 10-90% RH | -40°~ 60°C, 10-90% RH<br>-40°~140°F, 10-90% RH | -40°~ 60°C, 10-90% RH<br>-40°~140°F, 10-90% RH |
| IP Rating                     | Outdoor  | Outdoor  | Outdoor  |
| Certifications                | CE, ETL, FCC                                   | CE, ETL, FCC                                   | CE, ETL, FCC                                   |

Notes: The Specifications are for reference, actual values may vary.

# Dimensions

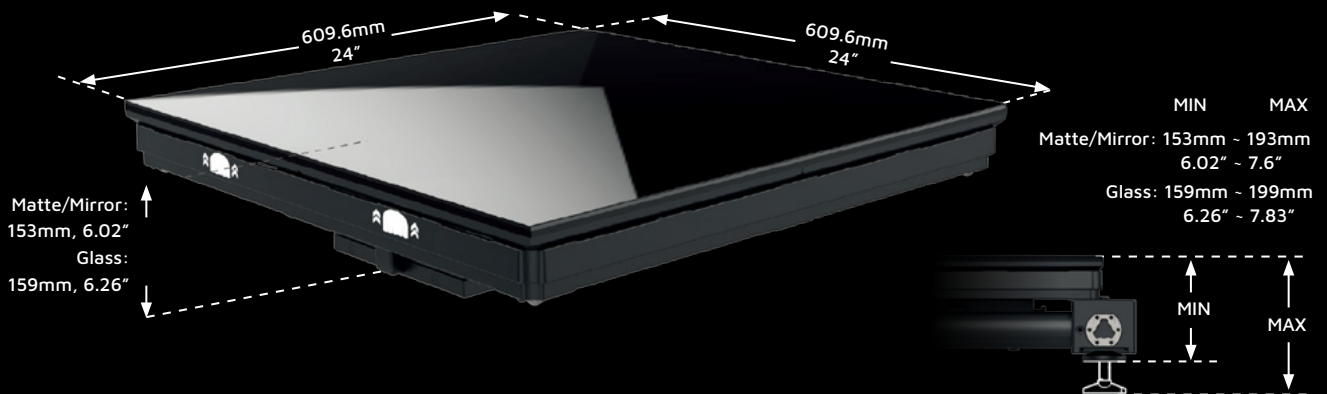

[www.roevisual.com](http://www.roevisual.com)