



ROE
CREATIVE DISPLAY

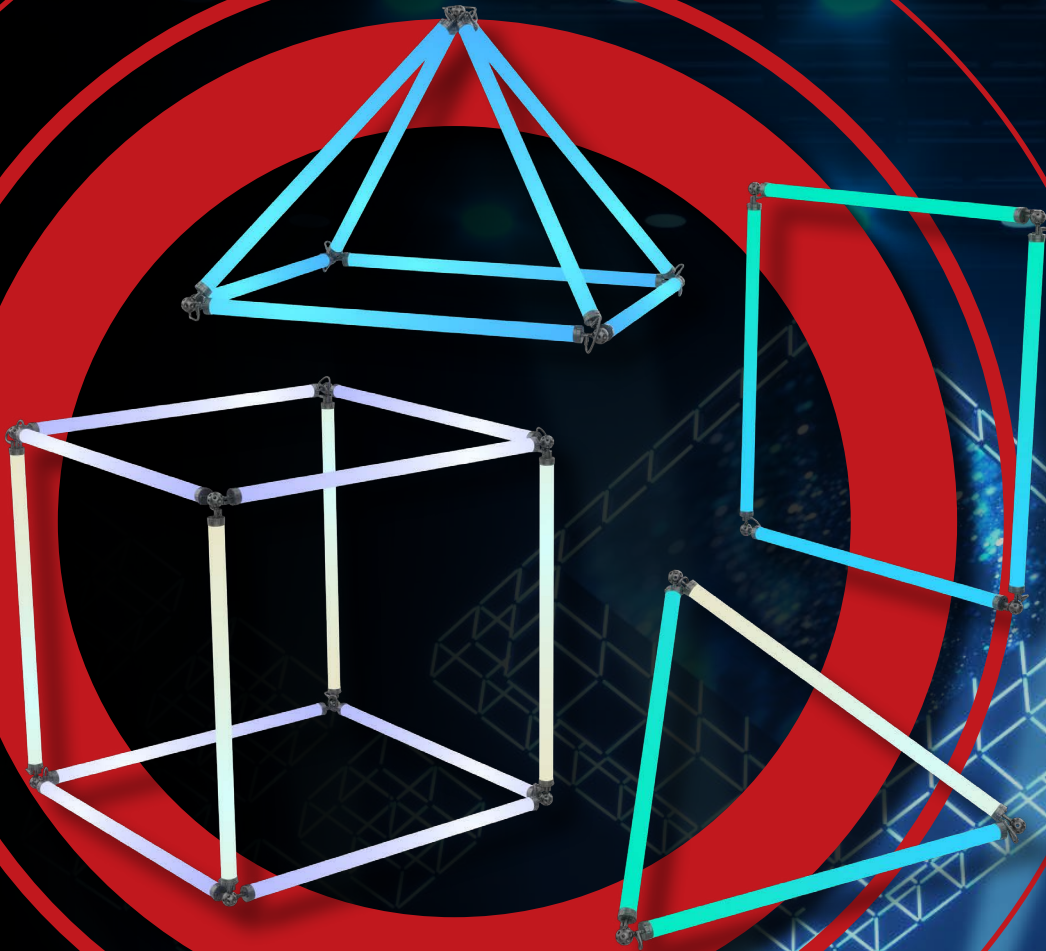

Omni Tube

Illuminate the Stage in 360°

IN-AND OUTDOOR LED PANELS

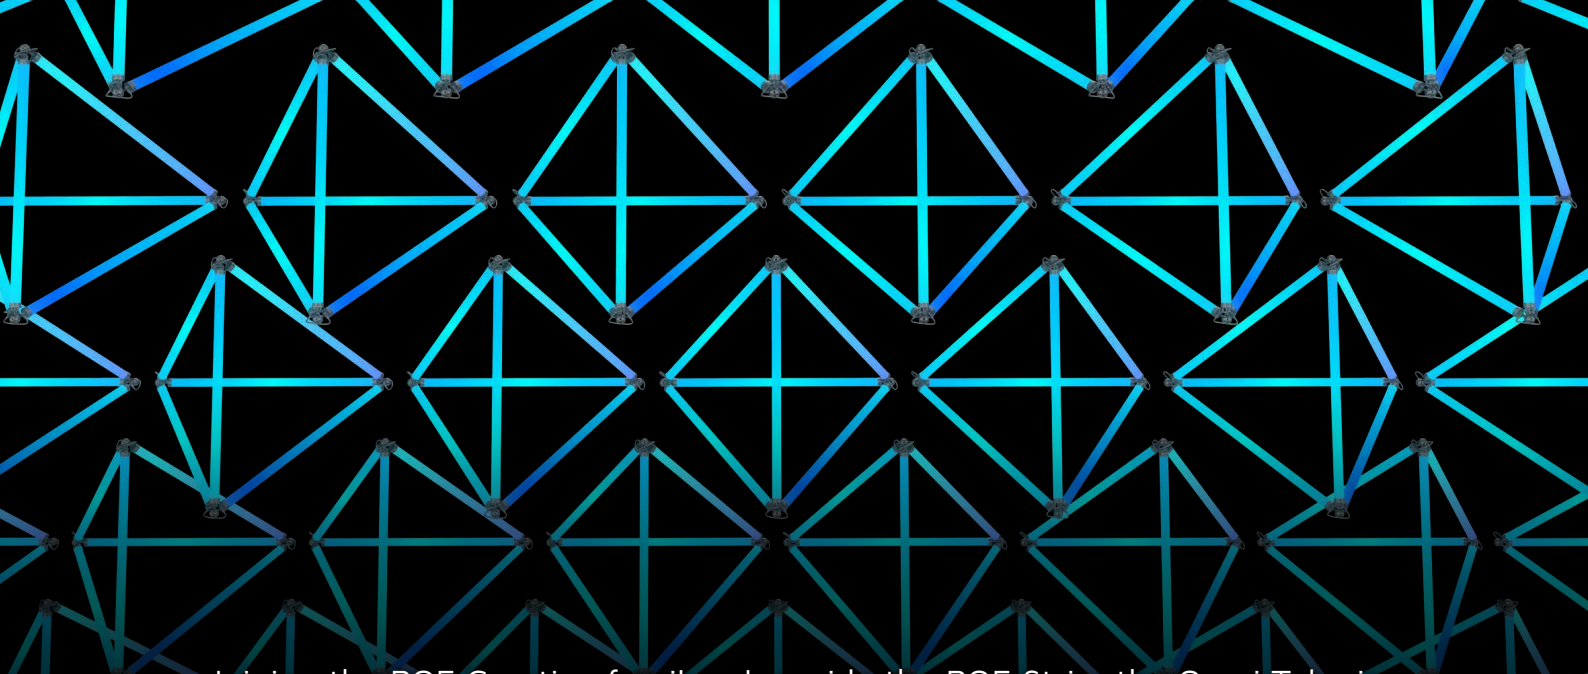


Joining the ROE Creative family, alongside the ROE Strip, the Omni Tube is a 360° mappable LED lighting solution that helps you achieve the perfect stage design from every angle.

With a high brightness of 800 lumens, it's ready to impress audiences with your creative ideas. The Omni Tube has a standard length of 120 cm and can be easily connected into various shapes such as strips, triangles, cubes, and more.


Create Your Own Style with Omni Tube

Unleash your creativity with Omni Tube. Omni Tube allows for versatile combinations, thanks to its specially designed connectors, cables, and locking pins, enabling you to transform any stage with a touch of innovation. Its vibrant illumination enhances any stage, allowing for versatile configurations and flexible assembly options.

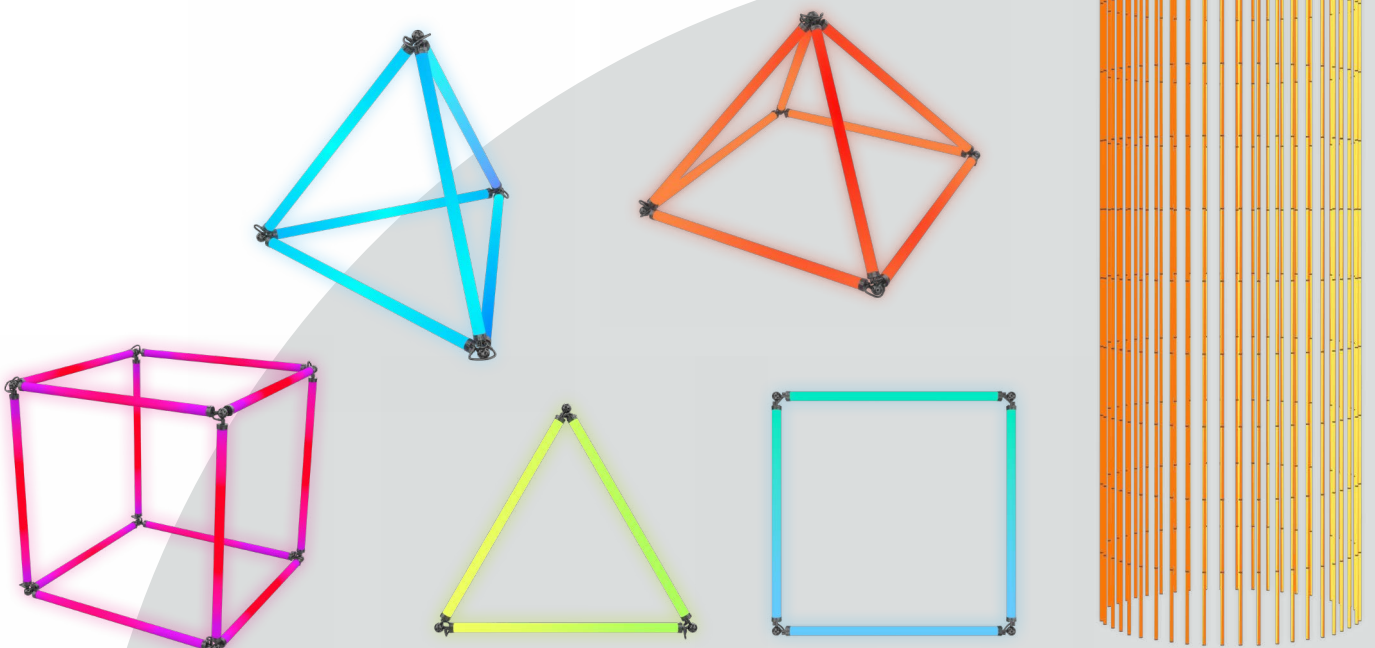

Dual-face Emitter

ROE Tri-face Emitter

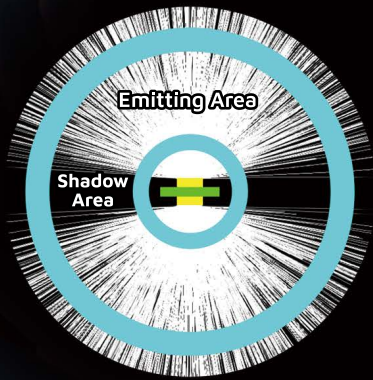

360° luminous



In-and outdoor use



High brightness



360° High Brightness

The Omni Tube is designed with a specially engineered structure and advanced LED technology, providing an impressive brightness of 800 lumens that stands out both day and night. With an IP65 rating, the Omni Tube is perfect for both indoor and outdoor use.

Mappable LED lighting solution



IP 65



Mappable LED Lighting Solution

Omni Tube is easy to control using the ROE Visual customized processor. Transform your ideas into reality by mapping the tubes to align with your vision.

Specifications

| Omni Tube | 1200mm Omni Tube |
|--------------------------------------|---|
| Luminous flux (lv) | 800 LM |
| Tubel Dimension | 1200 mm (L) x 50 mm (D) |
| Pixel Pitch | 11.95 mm |
| Tube Resolution (H x V) | 1 x 32 |
| Weight Per Tube | 1.2kg; 2.2lbs |
| Tube Power Consumption Max / Average | 40W / 20W |
| Power Box Consumption | 2500W |
| Processing Platform | Novastar |
| Processing | MX40-ROE |
| LED Configuration | SMD 2835 White |
| Viewing Angle | 360° |
| Scan Ratio | Static |
| Gray Scale | 16bit |
| Shell Material | Aluminum, PC |
| Operational Temp / Humidity | -20°~ 45°C, 10-90% RH -4°~113°F, 10-90% RH |
| Storage Temp / Humidity | -40°~ 60°C, 10-90% RH -40°~140°F, 10-90% RH |
| IP Rating | IP65 |
| Certifications | CE, CB, ETL, FCC, UKCA, WEEE |

*Note: The Specifications are for reference, actual values may vary.

Dimensions



www.roevisual.com

ROE China | ROE US | ROE EU | ROE UK | ROE JP | ROE ME | ROE AUS
roe@roevisual.com