


Specifications

Module	Vanish 8S
Pixel Pitch	8.9mm
Max. Brightness Calibrated	3,500nits
Panel Dimension	1000 x 1000 x 67mm 39.4" x 39.4" x 2.6"
Panel Resolution (H x V)	112 x 112
Weight Per Panel	9.0kg; 19.84lbs
Power Consumption (Max/Average)	440W / 220W
BTU Max/Average	1484 / 683
Transparency	62%
Serviceability	Front
Curving (Concave & Convex)	Concave 10°-Convex 10°
Max. Hanging (panels)	10*1
Max. Stacking (panels)	N/A
LED Configuration	SMD 1515 White
Viewing Angle Vertical	140°
Viewing Angle Horizontal	160°
Scan Ratio	1/4
Refresh Rate	3840Hz
Gray Scale	16bit
Frame Material	Aluminium Alloy
Operational Temp / Humidity	-20°- 45°C, 10-90%RH / -4°-113°F, 10-90%RH
IP Rating	Indoor
Certifications	CE, ETL, FCC

*Note: The Specifications are for reference, actual values may vary.

1. The max. hanging amount is only valid when the ROE Visual hanging bar and complementary accessories are used and in an indoor situation, safety factor is 8. No climbing is allowed.

Dimensions

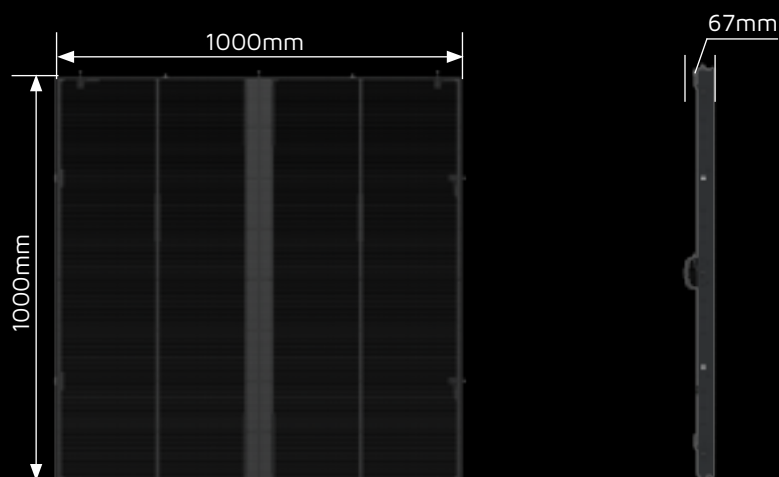

www.roevisual.com

ROE Visual Co., Ltd. | ROE Visual US, Inc. | ROE Visual Europe BV
roe@roevisual.com | usa@roevisual.com | europe@roevisual.com